



EXPRESS MOUNT FOR VSM®

PART NUMBER: **EM-1224**

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit SOLUTION

TOOLS REQUIRED: #2 Phillips screwdriver, 11/32" socket and driver or box /open end wrench.

PARTS INCLUDED: Pro.Fit Express Mount, hardware kit, decorative pad, alcohol swab, instructions, three (3) buttons, belt clip.

Install on a Pro.Fit International VSM or Legend mount. (not included)

The Express Mount is a simple holder designed for convenient, safe operation. Secure button to back of phone or other hand-held device with reliable 3M™ adhesive.

Attach Express Mount to Pro.Fit International Vehicle Specific Mount (VSM™) installed in vehicle and system is complete. May also be used on pedestals, clamshells or goose neck mounts. The Express Mount even works on devices in leather case or with built-in clips.

INSTALLATION INSTRUCTIONS

1. If using Express Mount with button, position with "T" slot facing up. If using with leather case or built in clip, position with "T" slot upside down so case / clip slot is on top. **Photo 1.**

2. Position Express Mount on VSM and secure with hardware.



3. Clean pad and Express Mount with enclosed alcohol swab, let dry, apply adhesive to pad, then apply Express Mount. Let adhesive "cure" for 72 hours before using. Minimum suggested installation temperature is 60° F.

4. Determine how you will mount device on Express Mount using adhesive button, case, built in clip or T-Slot Button.

5. Apply button to device. When applying to a case-less device, apply button to upper center portion on backside of device. If a charging unit is used, position button to clear charging unit. Use enclosed alcohol swab to clean application on device and let dry.

The T-Slot button is used with devices that are designed with the T-Slot key hole in the back. Most XM Satellite Radio cradles have the T-Slot key hole. **Photo 4.**

Side view of cell phone in cradle using Express Mount. **Photo 3.**

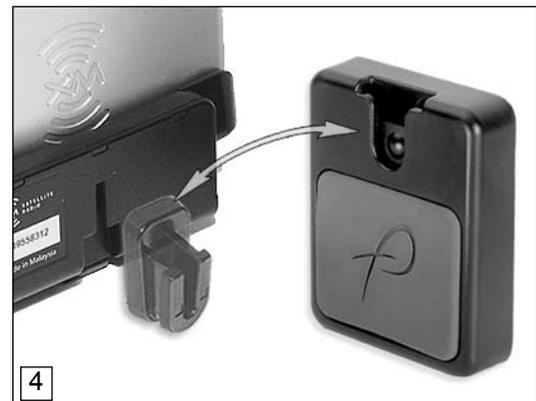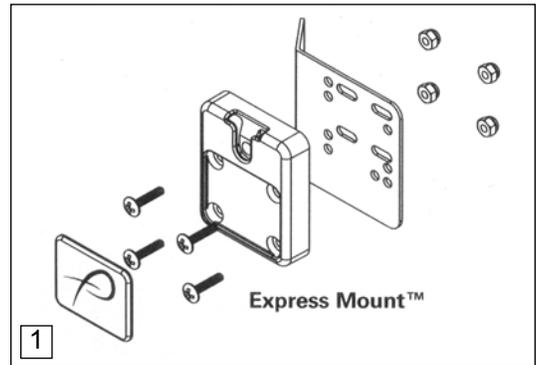

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

Installation Difficulty
 ● ○ ○ ○ ○
 Simple Advanced

© Pro.Fit International, Eagan, MN 2006

VIEW INSTRUCTIONS & UPDATES
 ONLINE @
 WWW.PRO-FIT-INTL.COM